



2N® LTE Verso

2N® LTE Verso combines minimum installation costs with a full feature set. Using LTE technology means no other cable apart from a power supply is needed, with a benefit of all advanced functionalities such as a video communication. The main unit with HD camera can be accompanied by RFID, Bluetooth or biometrics supporting modules.



Villas
Small office-home office

Family houses
Office building

Ideal retrofit solution

Thanks to LTE connection 2N® LTE Verso is not depending on available wiring and answering units. Together with 2N® Mobile Video service it offers full range of features like video calls to mobile devices and 2N answering units just like wired intercom.

Secure configuration via cloud

Connect 2N® LTE Verso to the LTE network and then use 2N® Mobile Video service on My2N.com to configure all its features from anywhere in the world via secured VPN connection.

Pick any of the 14 modules available

2N® LTE Verso is using a standard BUS and therefore it can be connected to any of the additional modules, e.g. RFID, Bluetooth or biometrics. Choose a module with technology that suits you the most.

2N® LTE Verso

FEATURES & BENEFITS

MINIMUM INSTALLATION COSTS

The LTE intercom doesn't need any cables and therefore it's an ideal solution for retrofit in older buildings where addition wiring installation would be uneconomical.

MODULARITY

The modularity of this IP intercom allows you to configure it to your requirements. Select the specific module, accessories and configurable functions.

MOBILE CREDENTIALS ARE FOR FREE

Unlike our competitors, 2N offers mobile credentials for free. It means that you do not need to pay 6-10USD per each credential. Simply install the app and start to use it without any further fees!

CALLS TO MOBILE PHONE AND TABLET

2N® LTE Verso will also allow you to call a mobile phone or tablet, over the local network via wi-fi or over cellular data.

CAMERA WITH NIGHT VISION

See who is standing in front of your door, even in total darkness. Moreover, the camera is hidden from normal view. The intruder has no clue they're being monitored.

SIP SUPPORT WITH NO SERVER NEEDED

SIP protocol support makes it easy to link the intercom with IP phones and PBX from other producers, without having to connect to the server.


PICTURE TO EMAIL

2N® LTE Verso allows you to email snapshots of the visitor captured by the camera at the time of the call.

ACCESS CONTROL

Achieve a greater level of security for all those at its location. 2N® LTE Verso makes it easy to prevent the entry of unauthorized persons.

DIAGRAM

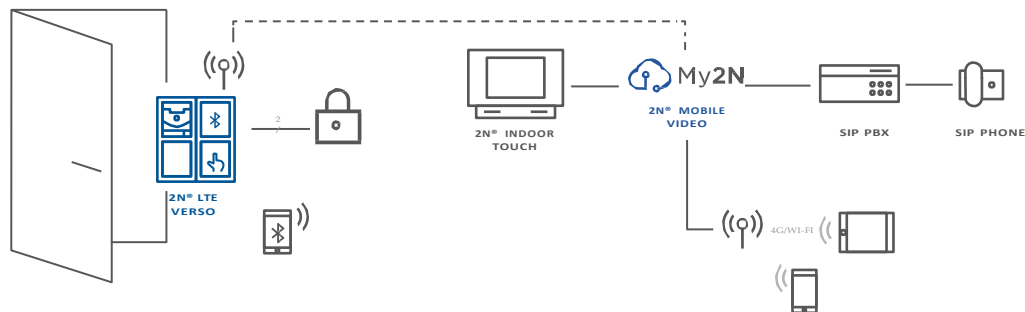

TECHNICAL PARAMETERS

Signalling protocol
SIP 2.0 (RFC - 3261)

Buttons
Buttons: Transparent buttons with white backlight and easily removable label
Number of buttons: 1 to 146
Numeric keypad: Optional

Audio
Microphone: 1 built-in microphone
Speaker: 2W
Sound pressure at 1 kHz at 1 m distance: 78 dB

Audio stream
Codecs: G.711, G.729, G.722, L16/16kHz

Camera (optional)
Resolution – JPEG: 1280 x 960 px
Resolution – video call: 640 x 480 px
Viewing angle: 120° (H), 90° (V), 145° (D)
Night vision: Yes

Video stream
Codecs: H.263+, H.263, H.264, MJPEG, MPEG-4

Interfaces
Power supply: 12V ± 15%/ 2A DC
Network connection: LTE FDD Cat.1, 3GPP release 9 compliant 4G Bands (MHz): B1(2100), B3(1800), B7(2600), B8(900), B20(800)
Output power - Class 3 (0.2 W, 23 dBm) @ LTE
Switch output: NC/NO contacts, max 30 V/1 A AC/DC
Connection speed: Uplink up to 5 Mbps
Downlink up to 10 Mbps
Active switch output: 8 to 12 V DC depending on power supply (source voltage minus 2 V), max 400mA

Mechanical properties
Operating temperature: -40°C – 60°C, touch display -30°C – 60°C
Storage temperature: -40°C – 70°C
Operating relative humidity: 10%-95% (non-condensing)
Coverage level: IP 54, IK08, touch display IK07

Dimensions
Dimensions depend on configuration of the modules and installation type – see www.2n.cz for details.

SOFTWARE




2N® Mobile Key – an application that turns your mobile phone into an access card

2N® Mobile Video – mobile application providing video calls from the intercom to your mobile device

Modularity

MODULARITY CLARIFIED

2N® LTE Verso can be tailored to your requirements. Select the specific modules, frame and mounting box.

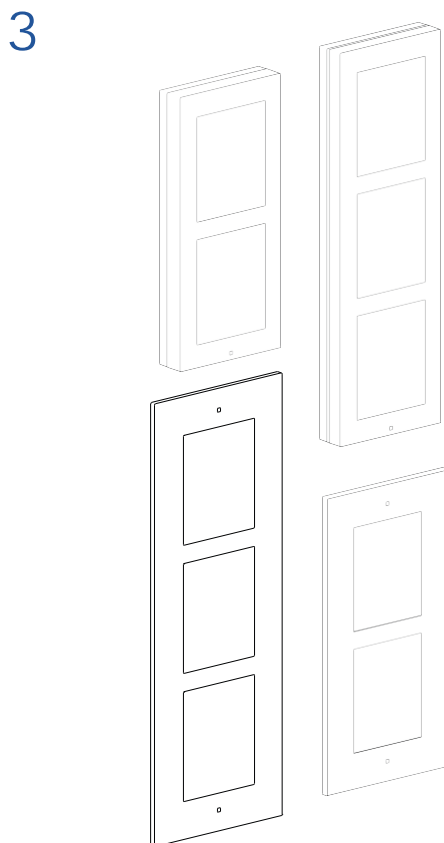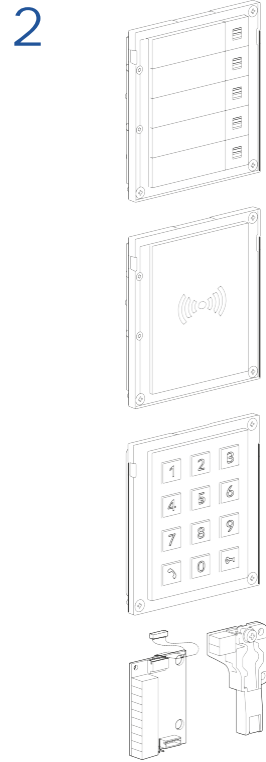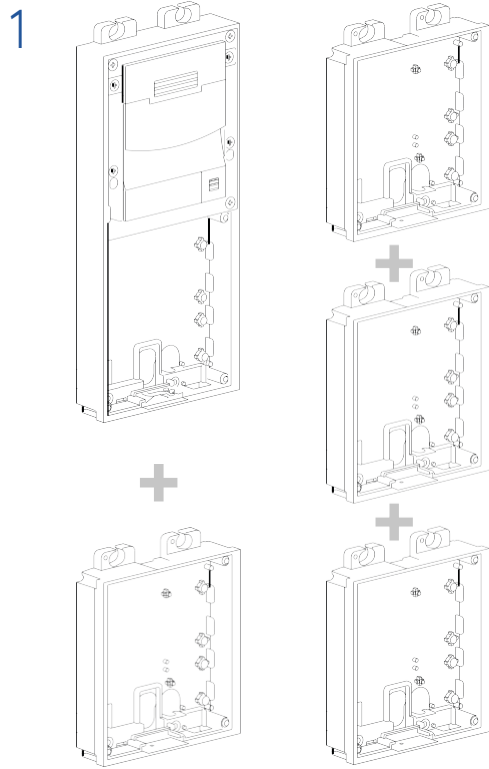

Modularity

MODULES

Main unit with camera and internal LTE* 9155401CB-E 9155401C-E	Infopanel 9155030	5 buttons 9155035	RFID card reader 125kHz 9155032	RFID card reader 13.56 MHz 9155033	
RFID card reader 13.56 MHz NFC 9155040	Secure RFID card reader 13.56 MHz with NFC 9155042	Fingerprint reader 9155045	Keypad 9155031B 9155031	Bluetooth 9155046	Touchscreen 9155036
Touch Keypad 9155047	Induction loop 9155041	Blind 9155039	Wiegand 9155037	Tamper switch 9155038	I/O 9155034

*2N® LTE Verso is supplied with an internal antenna, which is fitted in the module position under the main unit. In case you want to use a different module in this position, an external antenna (9155048) is needed.

FRAMES

Flush installation 1 module 9155011B 9155011	Flush installation 2 modules 9155012B 9155012	Flush installation 3 modules 9155013B 9155013	Surface installation 1 module 9155021B 9155021	Surface installation 2 modules 9155022B 9155022	Surface installation 3 modules 9155023B 9155023

● Black version
● Nickel version

ACCESSORIES

Boxes

Flush-mounting box for 1 module	9155014
Flush-mounting box for 2 modules	9155015
Flush-mounting box for 3 modules	9155016

Other

Extension cable – 1 m long	9155050
Blind button	9155051
Nametag foil	9155052

Backplates

Backplate – 1 module	9155061
Backplate – 2 modules	9155062
Backplate – 3 modules	9155063
Backplate – 2(w) x 2(h) modules	9155064
Backplate – 3(w) x 2(h) modules	9155065
Backplate – 2(w) x 3(h) modules	9155066
Backplate – 3(w) x 3(h) modules	9155067

External antenna

External LTE antenna	9155048
----------------------	---------